



ATLANTIC 1650

by  **Rolinx**
Performance Products

New Hot & Cold laminator

THERMAL LAMINATION

- Use of thermal encapsulation films up to 320 microns

COLD LAMINATION

- Single side lamination with or without waste paper
- Simultaneous single side lamination (and adhesive mounting
- Encapsulation with cold film in one run
- Application tape
- Colour background using colour vinyl
- Mounting onto boards up to 50 mm (2") thickness




- ☑ Speed up to 6,20 m/mn (21 ft/mn)
- ☑ Mounting up to 50 mm (2") thick.
- ☑ Hi-capacity hot and cold laminator up to 140°C (280°F)
- ☑ Working width 165 cm (65")





Specifications

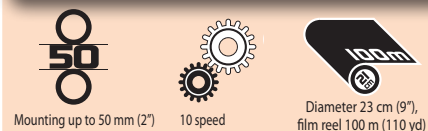

Atlantic 1650

Maximum thickness document + board	50 mm (2")
Maximum working width	171 cm (67")
Maximum film width	165 cm (64")
Maximum length of the film reels	100 m (maximum diameter 23 cm/9")
Diameter of the rollers	maximum 120 mm (4.7")
Temperature	independant heat on top and bottom up to 140°C
Heating time from 20°C to 100°C	30 mn
Number of self blocking shaft delivered	5 + 1 unwinding shaft
Adjustable speed m/mn	from 0,3 to 6,3
Adjustable speed ft/mn	from 0,9 to 21
Power W	3600
Voltage	230 V / 50-60 Hz
Amperage	16A/230 V
Dimensions of the machine (cm) (inch)	W 206 x D 82 x H 153 W 81" x D 32" x H 60"
Net weight of the machine	300 kg
Shipping dimensions of the machine (cm) (inch)	W 213 x P93 x H 170 L 84" x P 37" x H 66"
Machine weight for shipping	370 kg
Warranty	1 year
Made in France, CE certified in compliance with the Machine and the Electromagnetic Compatibility Directives CEM. ✓	

Roll to Roll system delivered as standard with the machine.



RoHS



www.rolinxusa.com